


# TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 50/55 D, BPR 55/65 D



No breakage of paving stones

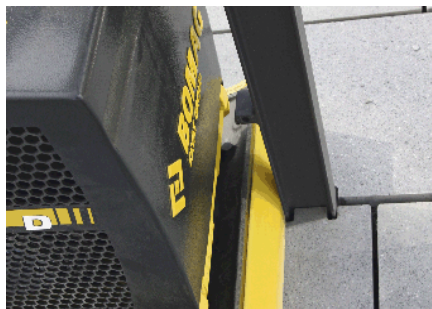


No damage to installations and borders



Large footprint for large formats

**Shipping dimensions in m3**

**BPR 50/55 D** 0,944  
**BPR 55/65 D** 0,944

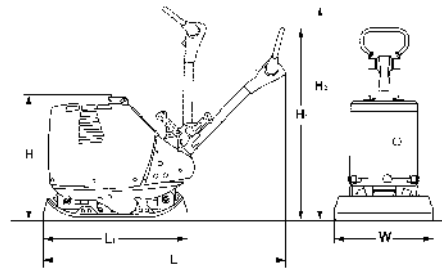

**Standard Equipment**

- STONEGUARD Special base plate
- Engine protection hood
- Comfortable control lever
- Low vibration steering rod
- Height adjustable steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear-resistant, powder-coated base plate
- Automatic decompression
- Multi-functional, foldable single-point lifting facility
- Extension plates (650mm)
- Electric starter
- Recoil starter
- Back-up drive protection
- Warning signal at low oil level (BPR55/65D)
- 3-2-1 Warranty
- Hour meter

**Optional Equipment**

- Tool kit
- Special painting
- Service Kit
- TOUGH WARRANTY

**Dimensions in mm**

	H	H1	H2	L	L1	W
<b>BPR 50/55 D</b>	800	990	1360	1735	970	680
<b>BPR 55/65 D</b>	800	990	1360	1735	970	680

**Technical Data**

**Weights**

Operating weight CECE (W)	kg	440	482
Basic weight	kg	435	477

**Dimensions**

Basic working width	mm	680	680
Lowest passing height	mm	800	800
Min. height w. steering in top position	mm	990	990
Max. height w. steering in top position	mm	1.230	1.230

**Driving Characteristics**

Working speed, max.	m/min	25	25
Max. gradeability (dep. on soil con.)	%	35	35

**Drive**

Engine manufacturer	Hatz	Kohler	
Type	1B 40	KD 15 440	
Emission stage	Stage V	Stage V	
Cooling	air	air	
Number of cylinders	1	1	
Performance ISO 3046	kW	6,7	6,8
Speed	min-1	3.000	3.000
Drive system	mech.	mech.	
Fuel	Diesel	Diesel	
Fuel consump. aver. during operation	l/h	1,5	1,4

**Exciter system**

Frequency	Hz	66	66
Centrifugal force	kN	50	55

**Capacities**

Fuel	l	5,0	5,0
------	---	-----	-----

Technical modifications reserved. Machines may be shown with options.



PRE 692 82 010

110219 Sa02

**BOMAG**  
 Hellerwald  
 D-56154 Boppard  
 P.O. Box 5162  
 Tel. (0)6742 - 1000  
 Fax (0)6742 - 3090

