

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPH 80/65 S



Maximum longevity

Full protection hood - engine and components protected all around



Safe operation

Radio/cable remote control or cable remote control




More transparency

Integrated diagnostic module with fault code display

Shipping dimensions in m3

BPH 80/65 S

0,702

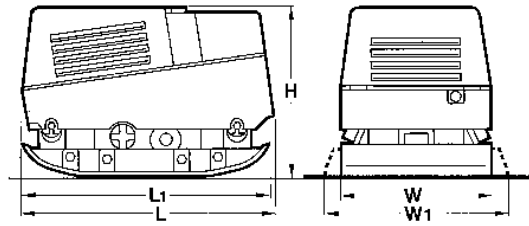

Standard Equipment

- Hydrostatic drive
- Cable remote control
- Electric starter
- Engine protection hood
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- Lockable engine cover and dash board
- Single point lifting device , foldable
- Battery disconnect switch
- Easy Service Concept
 - Diagnostic module with fault code display
 - Hour meter
 - foldable full protection hood
- 3-2-1 Warranty

Optional Equipment

- Special painting
- Combination remote control cable/radio
- Mobile quick charger
- Service Kit
- Tool kit
- TOUGH WARRANTY

Dimensions in mm

| | H | L | L1 | W | W1 |
|--------------------|-----|------|------|-----|-----|
| BPH 80/65 S | 785 | 1118 | 1088 | 650 | 800 |

Technical Data

Weights

| | | |
|----------------------------|----|-----|
| Operating weight CECE (W) | kg | 707 |
| Operating weight CECE (W1) | kg | 750 |
| Basic weight | kg | 745 |

Dimensions

| | | |
|-----------------------|----|-----|
| Basic working width | mm | 800 |
| Lowest passing height | mm | 785 |

Driving Characteristics

| | | |
|---------------------------------------|-------|----|
| Working speed, max. | m/min | 28 |
| Max. gradeability (dep. on soil con.) | % | 30 |

Drive

| | |
|--------------------------------------|-------------|
| Engine manufacturer | Hatz |
| Type | 1D 90 W |
| Emission stage | Stage V |
| Cooling | air |
| Number of cylinders | 1 |
| Performance ISO 3046 | kW 10,9 |
| Speed | min-1 3.000 |
| Drive system | hydraulic |
| Fuel | Diesel |
| Fuel comsump. aver. during operation | l/h 2,5 |

Exciter system

| | | |
|-------------------|----|------|
| Frequency | Hz | 55 |
| Amplitude | mm | 1,80 |
| Centrifugal force | kN | 80 |

Capacities

| | | |
|-----------|---|------|
| Fuel | l | 10,0 |
| Hydraulic | l | 25,0 |

Technical modifications reserved. Machines may be shown with options.

BOMAG

BPH 80/65 S



PRE 700 15 010

050219 Sa02

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

