


TECHNICAL DATA

BINDER SPREADER

BS 12000 PROFI



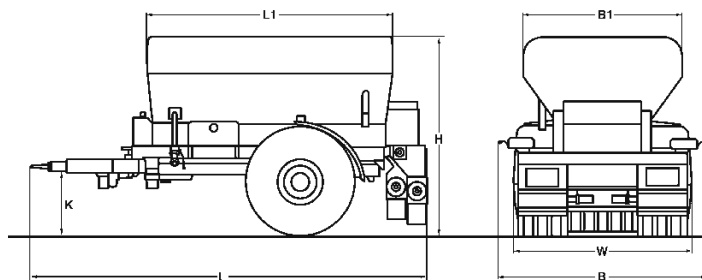

Standard equipment

- 3 rotary-gate valves
- Connection for compressed air filling, left
- Weighing plate for check weighing
- Tires with Ø 1750 mm and width 750 mm
- Pneumatic brake system
- Spreading sections 700/1000/700 mm (with standard width)
- Speed dependent dosing (PROFI)

Optional equipment

- Optional compressed air filling from the right
- Audible filling level signal
- Working width 2.7 m
- Sections 850/1000/850 mm

Dimensions in mm

BS 12000 PROFI

| B | B1 | H | K | L | L1 | W |
|------|------|------|-----|------|------|------|
| 2950 | 2415 | 3110 | 870 | 6510 | 3800 | 2400 |

Technical Data

| | |
|----------------------------------|-------------------|
| Type | |
| Capacity | m ³ |
| Theoretical yield* | l/m ² |
| Working width..... | mm |
| Number of rotary valves | |
| Weight (empty) | kg |
| Permiss. total weight | kg |
| Payload..... | kg |
| Noseweight | kg |
| Permitted transport speed | km/h |
| Tyre type | |
| Number of axles..... | |
| Universal drive shaft speed..... | min ⁻¹ |

**BOMAG
BS 12000 PROFI**

| |
|----------------|
| Towed spreader |
| 12 |
| 50 |
| 2.400 |
| 3 |
| 6.200 |
| 17.700 |
| 11.500 |
| 1.500 |
| 25 |
| 28.1R26AS |
| 1 |
| at least 540 |

*at working speed 2,4 km/h



PRE 910 74 010

180417 Sa01

BOMAG
Hellerwald
D-56154 Boppard
Postfach 5162
D-56149 Boppard
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

