


# TECHNICAL DATA

SINGLE DRUM ROLLERS

BW 219 D-4



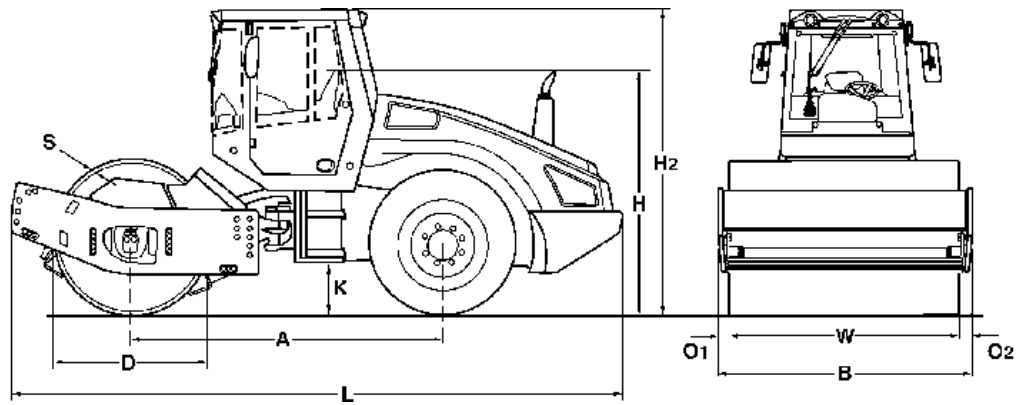

**Dimensions in mm**

	<b>A</b>	<b>B</b>	<b>D</b>	<b>H</b>	<b>H2</b>	<b>K</b>	<b>L</b>	<b>O1</b>	<b>O2</b>	<b>S</b>	<b>W</b>
<b>BW 219 D-4</b>	3255	2300	1600	2290	3025	450	6340	85	85	40	2130

**Shipping dimensions in m3**

**BW 219 D-4**

**without ROPS**

33,393

**with ROPS**

44,111

<b>Machine type</b>	<b>Compaction output (m3/h)</b>			
	<b>Rock fill</b>	<b>Gravel, sand</b>	<b>Mixed soil</b>	<b>Silt, clay</b>
BW 219 D-4	940-1880	700-1400	560-960	250-500

<b>Machine type</b>	<b>Compacted layer thickness (m)</b>			
	<b>Rock fill</b>	<b>Gravel, sand</b>	<b>Mixed soil</b>	<b>Silt, clay</b>
BW 219 D-4	1,40	1,00	0,70	0,30

## Technical Data

## BOMAG BW 219 D-4

### Weights

Grossweight .....	kg	20.780
Operating weight CECE w. ROPS-cabin .....	kg	19.050
Axle load, drum CECE .....	kg	12.800
Axle load, wheels CECE .....	kg	6.250
Static linear load CECE .....	kg/cm	60,1

### Dimensions

Working width .....	mm	2.130
Track radius, inner .....	mm	3.890

### Driving Characteristics

Speed (1) .....	km/h	0- 3,0
Speed (2) .....	km/h	0- 4,0
Speed (3) .....	km/h	0- 7,0
Speed (4) .....	km/h	0- 11,0
Max. gradeability without/with vibr. ....	%	50/48

### Drive

Engine manufacturer .....		Deutz
Type .....		BF6M 2012 C
Emission stage .....		Stage II / TIER2
Cooling .....		water
Number of cylinders .....		6
Performance ISO 3046 .....	kW	147,0
Performance SAE J 1995 .....	hp	197,0
Speed .....	min-1	2.300
Fuel .....		diesel
Electric equipment .....	V	12
Drive system .....		hydrost.
Drum driven .....		standard

### Drums and Tyres

Tyre size .....		23.1-26/12PR
-----------------	--	--------------

### Brakes

Service brake .....		hydrost.
Parking brake .....		hydromec.

### Steering

Steering system .....		oscil.artic.
Steering method .....		hydrost.
Steering / oscillating angle +/- .....	grad	35/12

### Exciter system

Drive system .....		hydrost.
Frequency .....	Hz	26/31
Amplitude .....	mm	2,00/1,10
Centrifugal force .....	kN	314/240
Centrifugal force .....	t	32,0/24,5

### Capacities

Fuel .....	l	340,0
------------	---	-------

Technical modifications reserved. Machines may be shown with options.

### Standard Equipment

- Warning, information and operation displays with round gauge
- Hydrostatic travel and vibration drive
- Hydrostatic articulated steering
- Articulated joint lock
- Rear axle with twin spring accumulator brakes
- No-Spin differential lock
- Warning horn
- Single lever control for travel and vibration
- Swivel seat, adjustable in height and longit. direction, with two armrests
- Contact scrapers
- Emergency STOP
- Noise insulation
- Back-up warning system

### Optional Equipment

- ROPS cabin with seat belts
- Working lights front/rear
- ROPS with safety belt
- Rotary beacon
- Indicator and hazard lights
- Contact scrapers (Steel)
- BOMAG Evib-Meter (BEM)
- TERRAMETER BTM plus
- TERRAMETER BTM prof
- BEM/BCM 05
- TERRAMETER/BCM 05
- Special painting
- Environmentally compliant hydraulic oil
- Air condition
- Sun roof
- Warning, information and operation displays
- Padfoot segment kit
- Radio
- Protective ventilation system

