


TECHNICAL DATA

TANDEM ROLLERS

BW 900-50



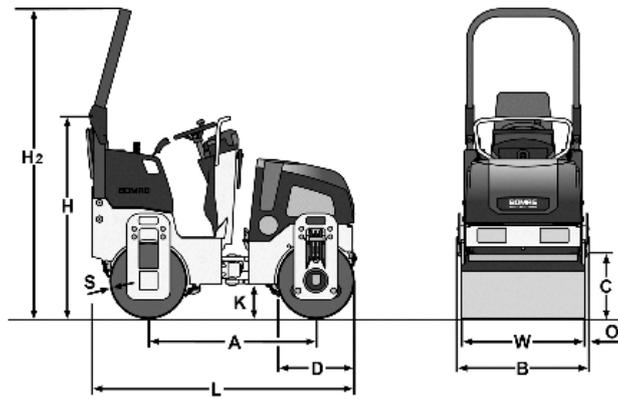

Dimensions in mm

| | A | B | C | D | H | H2 | K | L | O | S | W |
|------------------|----------|----------|----------|----------|----------|-----------|----------|----------|----------|----------|----------|
| BW 900-50 | 1223 | 961 | 450 | 560 | 1727 | 2290 | 250 | 1967 | 31 | 8 | 900 |

Shipping dimensions in m3

BW 900-50

without ROPS

3,265

with ROPS

4,901

| Machine type | Compaction output (m3/h) at recommended soil layer thicknesses | | |
|---------------------|---|-------------------|-------------------|
| | Gravel, sand | Mixed soil | Silt, clay |
| BW 900-50 | 50-100 | 35-70 | 30-55 |

| Machine type | Compaction output (t/h) at different asphalt layer thicknesses | | |
|---------------------|---|---------------|-----------------|
| | 2-4 cm | 6-8 cm | 10-14 cm |
| BW 900-50 | 10-25 | 20-40 | 30-60 |

Technical Data**BOMAG
BW 900-50****Weights**

| | | |
|---------------------------------------|-------|-------|
| Operating weight CECE | kg | 1.200 |
| Average axle load CECE | kg | 599 |
| Average static linear load CECE | kg/cm | 6,7 |

Dimensions

| | | |
|---------------------------|----|-------|
| Working width | mm | 900 |
| Track radius, inner | mm | 1.647 |

Driving Characteristics

| | | |
|---|------|--------|
| Working speed with vibration | km/h | 0- 4,0 |
| Max. travel speed | km/h | 0- 8,7 |
| Max. gradeability without/with vibr. | % | 40/30 |

Drive

| | | |
|------------------------------|-------|----------|
| Engine manufacturer | | Honda |
| Type | | GX 630 |
| Cooling | | air |
| Number of cylinders | | 2 |
| Performance SAE J 1349 | kW | 14,9 |
| Speed | min-1 | 3.300 |
| Electric equipment | V | 12 |
| Drive system | | hydrost. |
| Driven drum | | 2 |

Brakes

| | | |
|---------------------|--|----------|
| Service brake | | hydrost. |
| Parking brake | | mech. |

Steering

| | | |
|-----------------------------|------|--------------|
| Steering system | | oscil.artic. |
| Steering method | | hydrost. |
| Steering angle +/- | grad | 33 |
| Oscillating angle +/- | grad | 6 |

Exciter system

| | | |
|-------------------------|----|----------|
| Vibrating drum | | front |
| Drive system | | hydrost. |
| Frequency | Hz | 70 |
| Amplitude | mm | 0,50 |
| Centrifugal force | kN | 15 |

Sprinkler System

| | | |
|--------------------------|--|----------|
| Type of sprinkling | | pressure |
|--------------------------|--|----------|

Capacities

| | | |
|-------------|---|-------|
| Fuel | l | 27,0 |
| Water | l | 137,0 |

Technical modifications reserved. Machines may be shown with options.

Standard Equipment

- Hydrostatic travel and vibration drive
- Travel drive in series
- Front drum vibration
- Vibration control in travel lever
- Oscillating artic. center joint
- Hydrostatic articulated steering
- Mechanical parking brake
- 2 scrapers per drum
- Plastic water tank
- Pressure sprinkler system
- Hour meter
- Low fuel level indicator
- Control and warning indicator lights
- Automatic shutdown at low oil level
- Lockable anti vandal dashboard protection
- Seat belt
- Single point lifting device
- Transport lashing and lifting points
front/rear
- Lockable engine cover
- Emergency engine shut down
- Corrosion and weather protected ignition
switch
- Back-up alarm

Optional Equipment

- ROPS
- Foldable ROPS
- Working lights front and rear

