




# TECHNICAL DATA

COMBINATION ROLLER

BW 90 AC-5



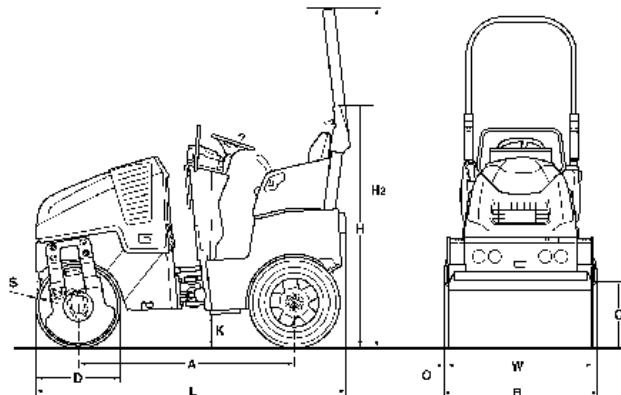

#### Dimensions in mm

	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>H</b>	<b>H2</b>	<b>K</b>	<b>L</b>	<b>O</b>	<b>S</b>	<b>W</b>
<b>BW 90 AC-5</b>	1483	956	433	580	1627	2304	255	2194	28	12	900

#### Shipping dimensions in m<sup>3</sup>

**BW 90 AC-5**

**without ROPS**

3,413

**with ROPS**

4,833

<b>Machine type</b>	<b>Compaction output (t/h) at different asphalt layer thicknesses</b>		
	<b>2-4 cm</b>	<b>6-8 cm</b>	<b>10-14 cm</b>
<b>BW 90 AC-5</b>	10-35	30-45	40-70

**Technical Data****BOMAG  
BW 90 AC-5****Weights**

Operating weight CECE .....	kg	1.570
Axle load, drum / wheels CECE .....	kg	740/830
Wheel load CECE .....	kg	208
Static linear load, front CECE .....	kg/cm	8,2
Grossweight .....	kg	1.900

**Dimensions**

Working width .....	mm	900
Track radius, inner .....	mm	2.030

**Driving Characteristics**

Speed .....	km/h	0- 10,0
Working speed with vibration .....	km/h	0- 10,0
Max. gradeability without/with vibr. ....	%	40/30

**Drive**

Engine manufacturer .....		Kubota
Type .....		D 902
Emission stage .....		Stage V / TIER4f
Cooling .....		water
Number of cylinders .....		3
Performance ISO 14396 .....	kW	15,1
Performance SAE J 1995 .....	hp	20,2
Speed .....	min-1	3.000
Speed adjustment 1 .....	min-1	2.100
Speed adjustment 2 .....	min-1	3.000
Electric equipment .....	V	12
Driven drum .....		front
Driven wheels .....		4

**Drums and Tyres**

Tyre size .....		190/60-15
-----------------	--	-----------

**Brakes**

Service brake .....		hydrost.
Parking brake .....		hydromec.

**Steering**

Steering system .....		oscil.artic.
Steering method .....		hydrost.
Steering / oscillating angle +/- .....	grad	33/8
Crab walk .....		0- 50

**Exciter system**

Vibrating drum .....		front
Drive system .....		hydrost.
Frequency .....	Hz	42/63
Amplitude .....	mm	0,50
Centrifugal force .....	kN	8/17

**Sprinkler System**

Type of sprinkling .....		pressure
--------------------------	--	----------

**Capacities**

Fuel .....	l	30,0
Water .....	l	100,0
Emulsion .....	l	11,0

Technical modifications reserved. Machines may be shown with options.

### **Standard Equipment**

- Four smooth rear rubber wheels
- Hydrostatic travel and vibration drive
- 2 scrapers per drum, spring loaded and tiltable
- Pressure sprinkler system with interval switch
- Multi function travel lever
- Multi-function display incl. operating hour meter
- Water level
- Emergency STOP
- Intelligent Vibration Control (IVC)
- Integrated stowage compartment
- Adjustable operator's seat
- Seat contact switch
- Vandalism protection
- 12V socket
- Working lights front and rear
- Back-up alarm
- Lockable engine hood made of composite material
- Lashing eyes, galvanized
- Single point lifting device

### **Optional Equipment**

- ROPS with safety belt
- \* Foldable ROPS incl. seat belt
- Double travel lever
- Seat heating
- ECONOMIZER with asphalt temperature display
- Temperature display
- BOMAG TELEMATIC
- Electronic fuel gauge
- Theft protection
- Indicator and hazard lights
- Rotary beacon
- Optional lighting on ROPS
- Battery disconnect switch
- Environmentally compliant hydraulic oil
- Special painting
- Edge cutter
- Port for hydraulik breaker
- Backup warning buzzer with broadband technology
- Brake release device

\* Standard delivery with CE conformity  
(valid within European Union)

